



24V Electromechanical actuator with articulated arm

MAX WIDTH SINGLE LEAF

0.5 - 2.5 m (with electric lock)

USE FREQUENCY
(CYCLES/DAY)


continuous



PRODUCT'S PLUS

- The actuator features the innovative E034 electronic board, which can be programmed locally via display and button or via Simply Connect. It ensures simple yet versatile installation, offering two programming levels to best meet installation requirements and comply with regulatory standards.
- It is compatible with the optional XLC module, which reduces standby power consumption to 0.5W (2W with Simply Connect). It also supports alternative energy sources such as solar panels, while saving money and respecting the environment.
- Refurbished aesthetics characterised by essential, timeless lines

INSTALLATION DIMENSIONS

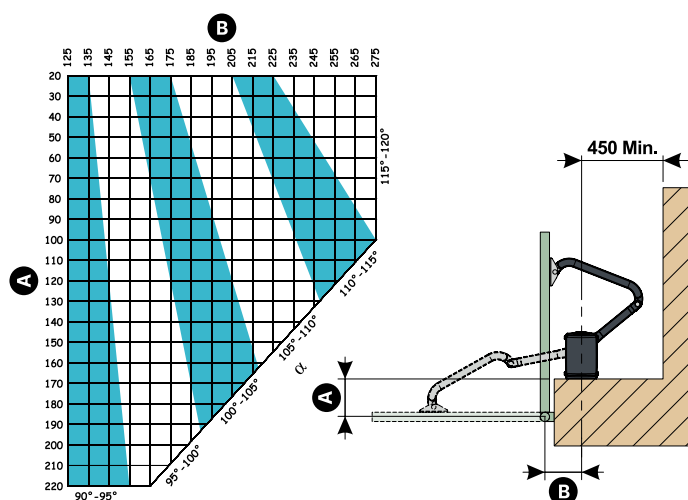

EXTERNAL AUTOMATIONS FOR SWING-LEAF GATES

392 C

24V Electromechanical actuator with articulated arm

FAAC



TECHNICAL SPECIFICATIONS


Model	392 C	392
Power supply voltage	220-240V~ 50/60 Hz	-
Electric motor	With brushes 24V	
Max. torque	300 Nm (*)	
Max. angular speed	8,5 °/s (*)	
Max. leaf weight	See graphic A	
Max. leaf opening angle	120°	
Operating ambient temperature	-20 °C ÷ +65 °C	
Protection class	IP44	
Weight	11,7 Kg	9 Kg
Use frequency	Continuous use	
Max. leaf width	2,5 m with electric lock	
Dimensions (LxDxH)	183 x 256 x 304 mm	
Electronic equipment	built-in E034	-



GREENtech system:
392 24V + E034



INSTALLATION EXAMPLE

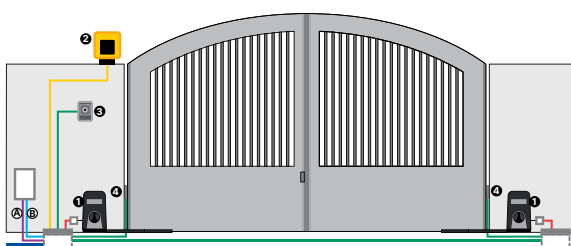

A Low voltage cabling

- 3x0,50 mm² cable
- 2x0,50 mm² cable
- 2x2,50 mm² cable
- 2x1,50 mm² cable

B Power cabling (230V)

- 2x1,5 mm² +T cable

REF	Q.TY	DESCRIPTION
1	1	392 C Motor with electronic control unit and articulated arm
1	1	392 Motor without electronic control unit
1	1	XF 433 MHz receiver
2	1	XLED flashing light
3	1	Key operated button XK10B
3	1	Lock with key
4	1	Pair of photocells XP 20 BD
1	1	2 channels transmitter XT2 433 SLH LR

IMPORTANT: to ensure correct operation, make sure that the distance between the gate hinge and any walls or lateral fencing is greater than 725 mm.

For a single-wing gate buy a 392 C actuator. For a double-wing gate buy a 392 C actuator and a 392 actuator.

IMPORTANT: the E034 electronic board, thanks to new and technologies, is only compatible with the XF 433/XF 868 receiver (connector set-up) and the XP 20B D and XP 30B photocells (BUS connection).

www.faactechnologies.com

FAAC S.p.A - Soc. Unipersonale - Via Calari 10 - 400069 Zola Predosa (BO) Tel. +39 051 61724