



MAX WIDTH OF SINGLE PANEL

1,5 - 2 m


USE FREQUENCY (CYCLES/HOUR)

50



PRODUCT'S PLUS

- Ideal for bi-folding doors. Opening and closing through telescopic arm.
- In case of power cut the release device on the operator makes it possible to open and close the gate manually.
- Anti-crushing guaranteed by a pair of by-pass valves.



TECHNICAL SPECIFICATIONS

Model	560 CBAC	560 SB
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	Asynchronous single phase	
Max. power	220 W	
Max expressed force	-	
Max. torque	320 Nm (*)	
Max. angular speed	12,4 °/s (*)	
Motor-pump unit capacity	1 lpm (*)	
Operating ambient temperature	-20 °C ÷ +55 °C	
Thermal protection	120°C	
Protection class	IP55	
Type of oil	FAAC HP OIL	
Weight	12 Kg	
Dimensions (LxDxH)	480 x 85 x 110 mm	
Electronic equipment	Not included	
Max. leaf width	1,50 m (single panel)	2,00 m (single panel)
Use frequency	80 cycles/hour	


(*) data referred to 230V~ 50Hz.



GREENtech system:
560 + E045S or E145S



INSTALLATION EXAMPLE

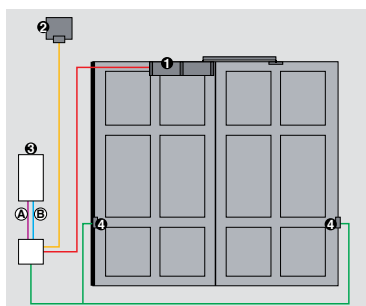

■ **B** Power cabling (230V)
2x1,5 mm² +T cable

REF	Q.TY	DESCRIPTION
1	1	560 CBAC hydraulic operator 230V
1	1	Standard telescopic arm
2	1	XLED flashing light
3	1	Key operated button XK10B
3	1	Lock with key
4	1	E045S control unit
4	1	Enclosure mod. E for electronic control units
4	1	XF 433 MHz receiver
4	1	Pair of photocells XP 20 BD
1	1	XT2 433 SLH LR 2-channel transmitter