

FAAC



AUTOMATIC BARRIERS

620 Standard

Automatic Barrier 230V

MAX BEAM LENGTH

4 - 5 m

OPENING TIME

3,5 - 4,5 s


USE FREQUENCY

70%



- Patented electronic deceleration and barriers status signalling through traffic management devices.
- The ideal solution for heavy but not continuous traffic.
- Two channels integrated detector and 11 pre-set logics

INSTALLATION DIMENSIONS

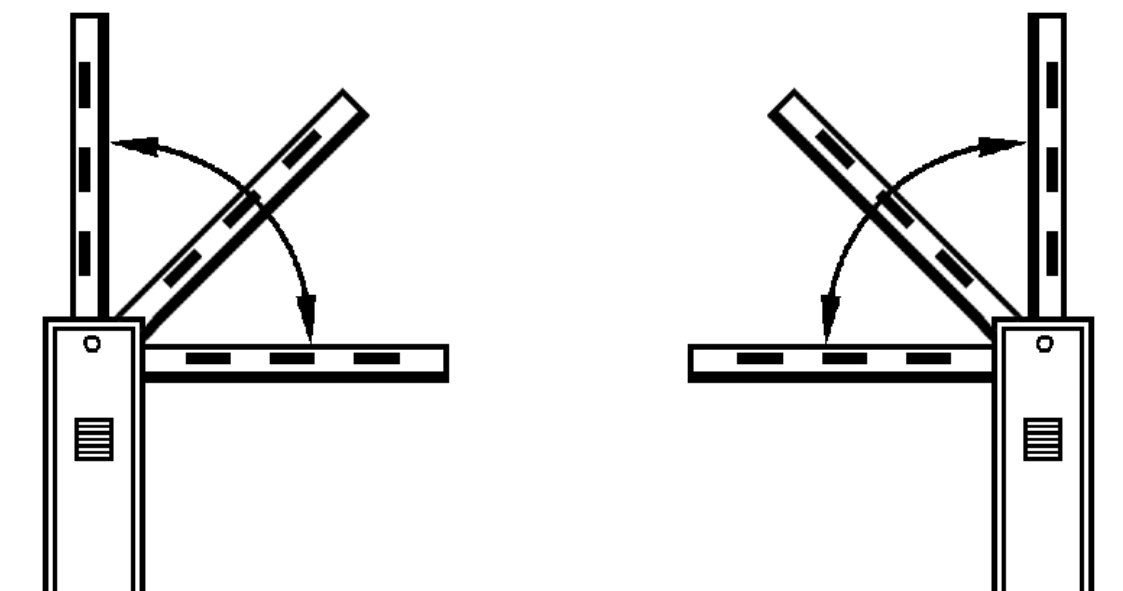

620 Standard


TECHNICAL SPECIFICATIONS

2easy

Model	620 Standard
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Motor rotation speed	1400 rpm (*)
Max. power	220 W
Max. torque	0 ÷ 220 / 0 ÷ 180 Nm (*)
Motor-pump unit capacity	0,75-1 lpm (*)
Material type	Steel
Type of treatment	100 micron protective primer + polyester painting RAL 2004
Encoder	No - anti-crushing hydraulic safety device
Type of deceleration	Electronic - Adjustable with cams
Type of beam	Rectangular - Rectangular with skirt - Articulated - Round - Round pivoting
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	120°C
Cooling	-
Protection class	IP44
Weight	73 Kg
Type of oil	FAAC HP OIL
Dimensions (LxDxH)	350 x 170 x 1080 mm
Beam max length	5 m
Opening time	3,5 s (90° - 3 m) - 4,5 s (90° - 4 m)
Use frequency	70%
Electronic equipment	624BLD incorporated

CE

INSTALLATION EXAMPLE

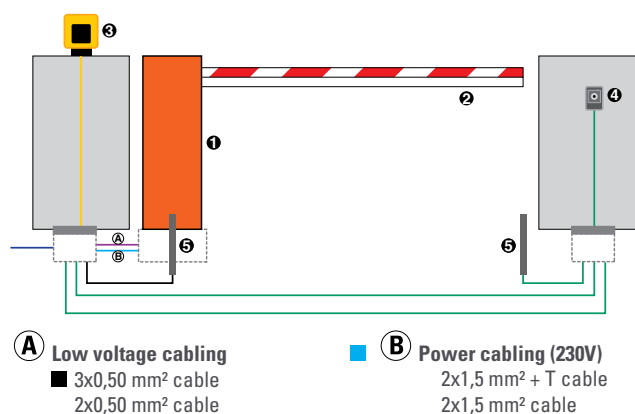

REF	Q.TY	DESCRIPTION
1	1	620 Standard barrier
1	1	Foundation plate
1	1	Plug in receiver 1 channel RP 433 SLH
2	1	Beam bracket for rectangular beam
2	1	Rectangular standard beam - Length 4,815 mm
3	1	XLED flashing light
4	1	Key operated button XK10
4	1	Lock with key
5	1	Pair of photocells XP 30
5	2	Adaptors for wall columns
5	2	Low column H500 (multiple saleable quantity 2 pcs)
5	2	Foundation plate for column
1	2	channels transmitter XT2 433 SLH LR